


SEED SHUTTLE 290



180 degree conveyor swivel with both side and rear unloading positions

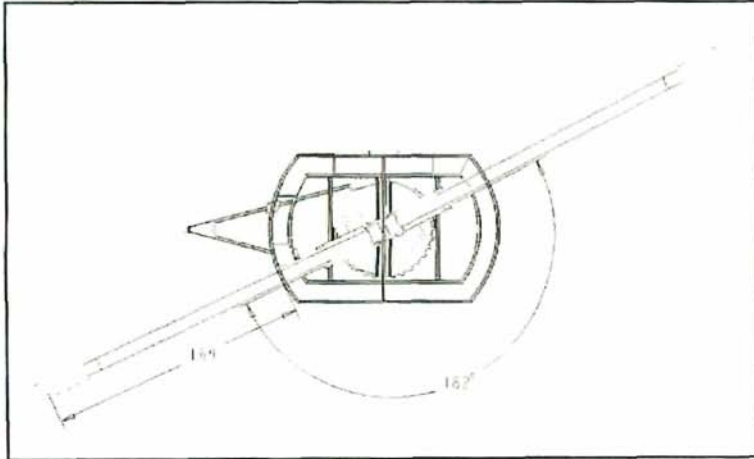

8" diameter tube, 10" wide all rubber belt and a 23' long conveyor for extra reach



2 - 45" X 27" sealed lid openings with 18" wide catwalk



5.5 Honda motor, battery and variable flow controls

Features of the Seed Shuttle 290:

- 180 degree conveyor swivel with both side and rear unloading positions
- 2 - 145 unit poly tanks with independent slide controls
- 2 - 45" X 27" sealed lid openings
- 8" diameter tube 23' long conveyor for extra reach
- 10" wide all rubber belt
- Enclosed belt on return of conveyor
- 17 locking positions on the conveyor
- Transport lock on the conveyor for safety
- 3 piece telescoping downspout with end variable flow controls
- 5.5 Honda motor, battery and variable flow controls
- 18" wide catwalk with side ladder access
- Powder Coated Frame
- Heavy Duty Frame (4500lb approximate weight)

Seed Shuttle 290 Options:

Trailer with 2-7000lb torsion axles and adjustable hitch

Weigh scales